



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CIS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF CIS IS PROHIBITED.


ECN/ECO		PLACES	REV.	REVISIONS		SIGN	DATE
			E1	DESCRIPTION			
				Design Release		Wanbin Liu	2019.4.9

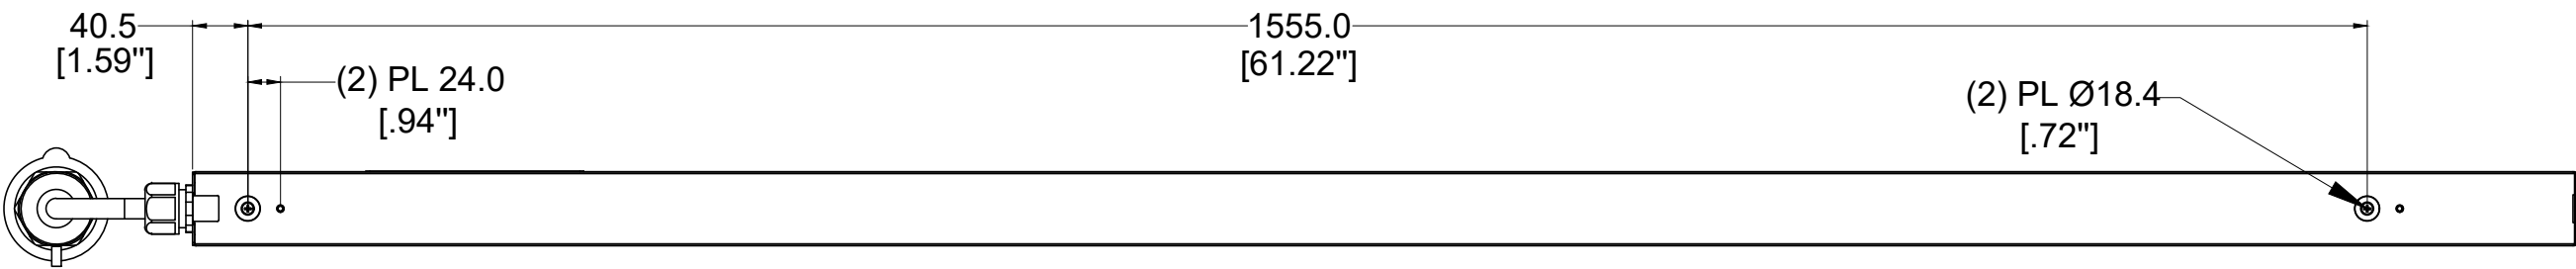


REAR VIEW

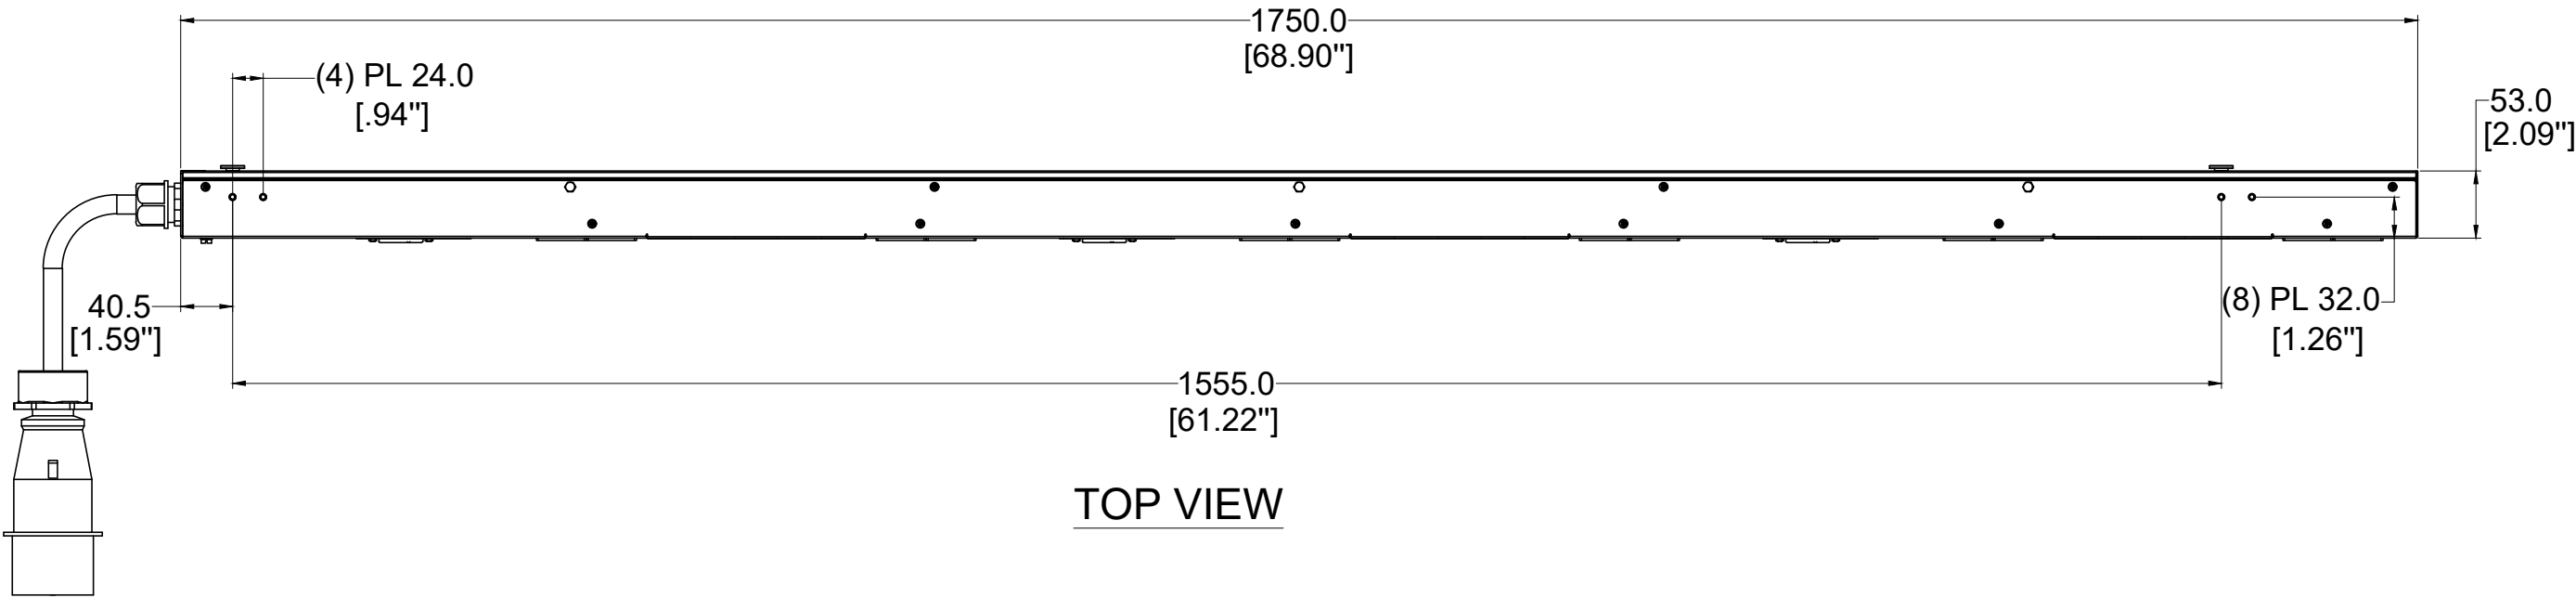


TOP VIEW

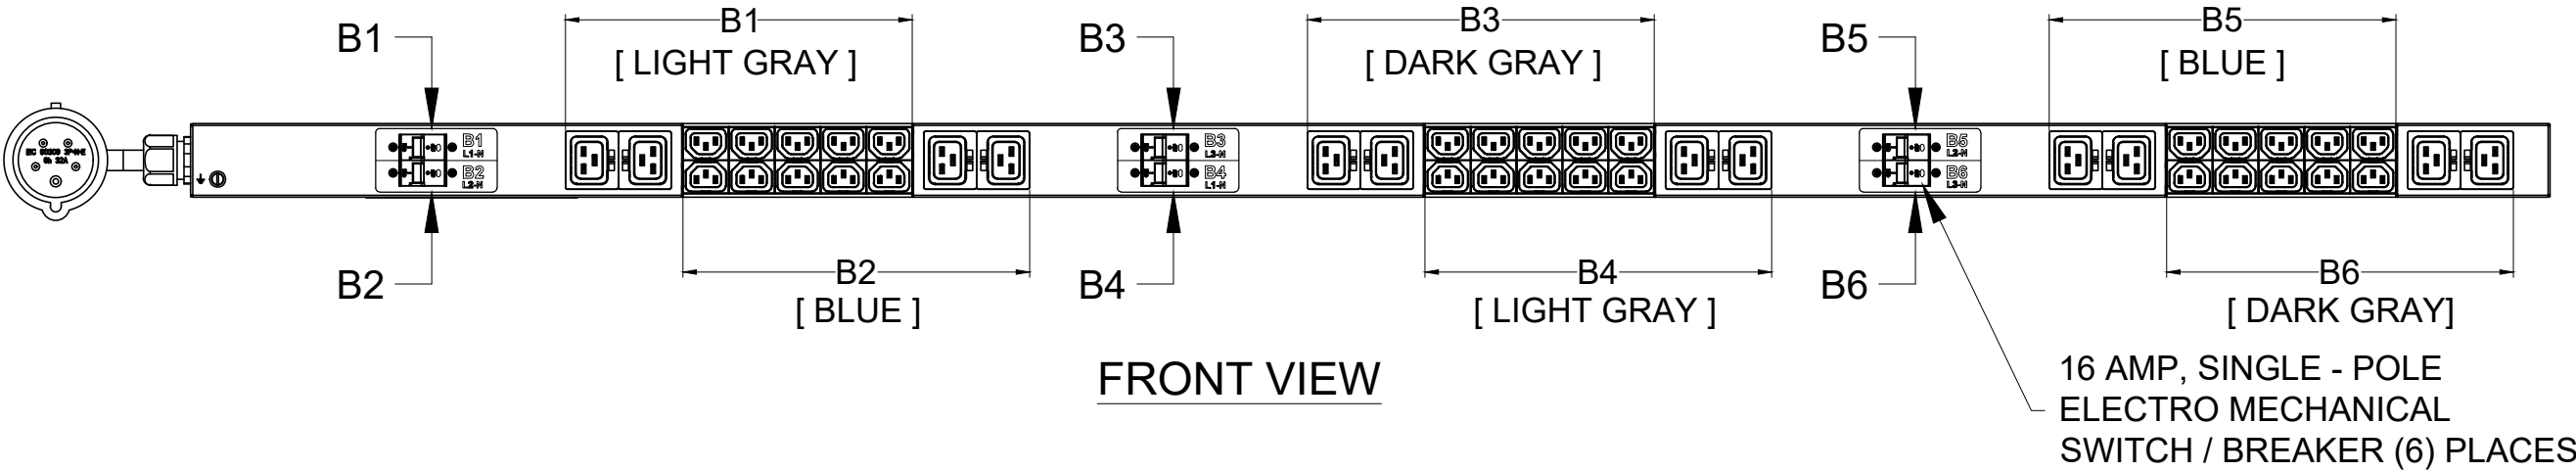


FRONT VIEW

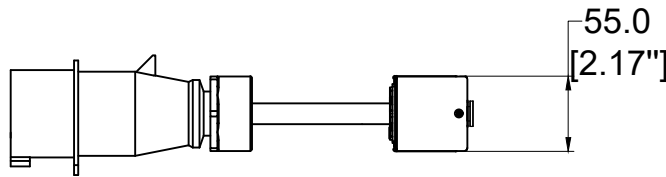


SIDE VIEW



PLUG
32 AMP, 230/400V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF, IP44
2P (S); 4T (W), 6H;



RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19



RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

SPECIFICATION:
1. STANDARD:

UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(30) C13, (12) C19
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	32A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT CORD LENGTH:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

NOTE:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSION ARE IN INCHES

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X. ± 1 MM X.X ± 0.5 MM X.XX ± 0.20 MM ØX.X ± 0.4 MM ØX.XX ± 0.20 MM THIRD ANGLE PROJECTION IF 2D AND 3D DIFFER, 2D SHALL TAKE PRECEDENCE	DESIGNER & DATE: Wanbin Liu 2019-4-9	 ASIA PACIFIC CIS WUXI CHINA	
	STANDARDIZATION/CHECKER & DATE: Hanson Xu 2019-4-11		
	DFM & DATE: Talon Lv 2019-4-11	DESCRIPTION: EN2.0 PDU	
	APPROVER & DATE: Kanson Ren 2019-4-11	P/N: EB0811	REV: E1
ITEM WEIGHT (REFERENCE ONLY): Assembly		SCALE 1:5 (DO NOT SCALE DRAWING)	SIZE: A2 SHEET 1 OF 2

