

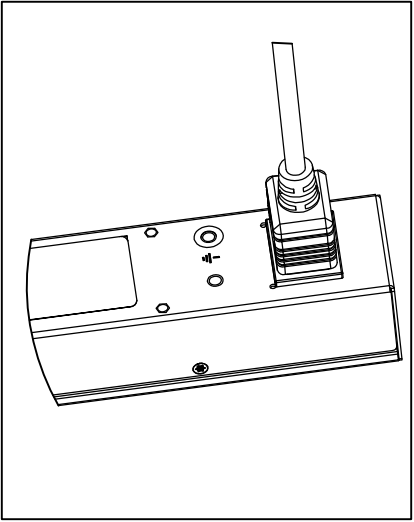
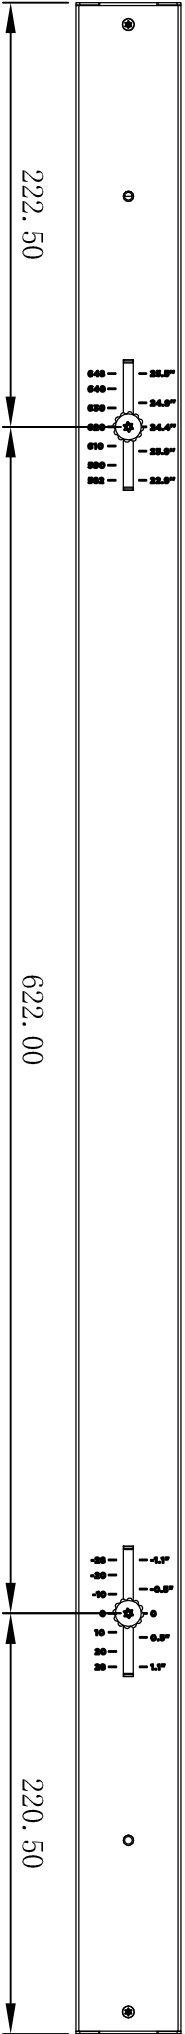
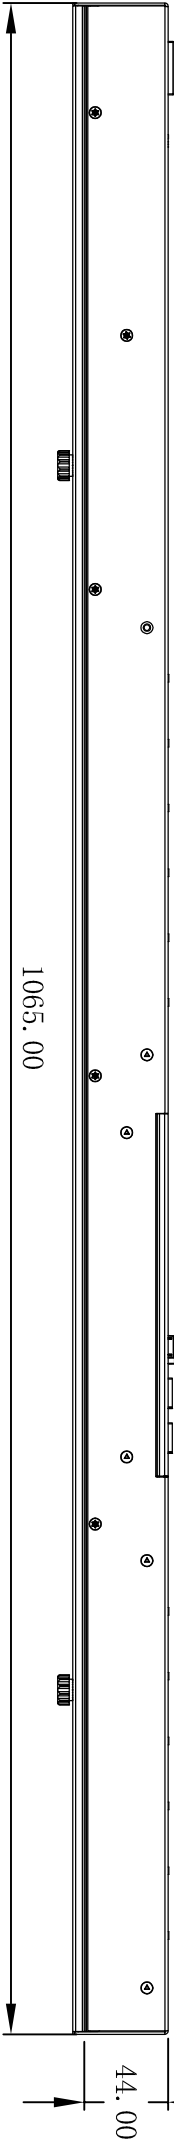


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ENLOGIC. ELECTRIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION OF ENLOGIC. ELECTRIC IS PROHIBITED.


INPUT POWER CORD
FIELD REMOVABLE

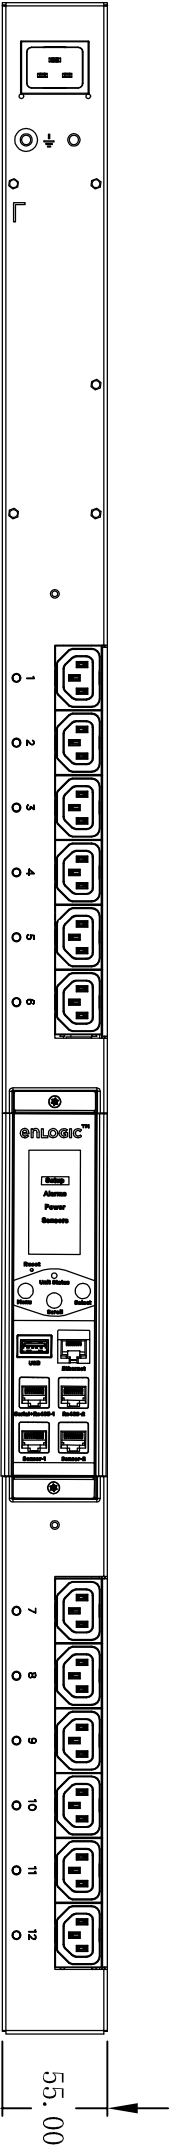

PLUG DETAIL

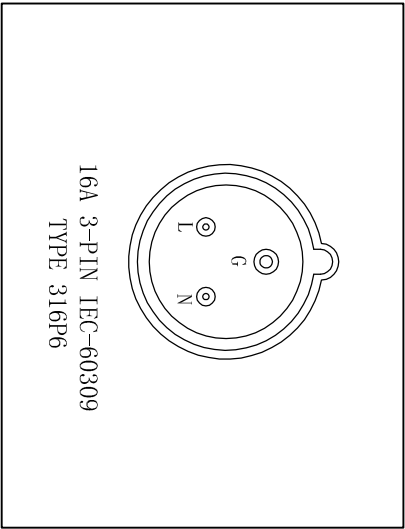

ADJUSTABLE TOOLLESS INSTALLATION PEGS

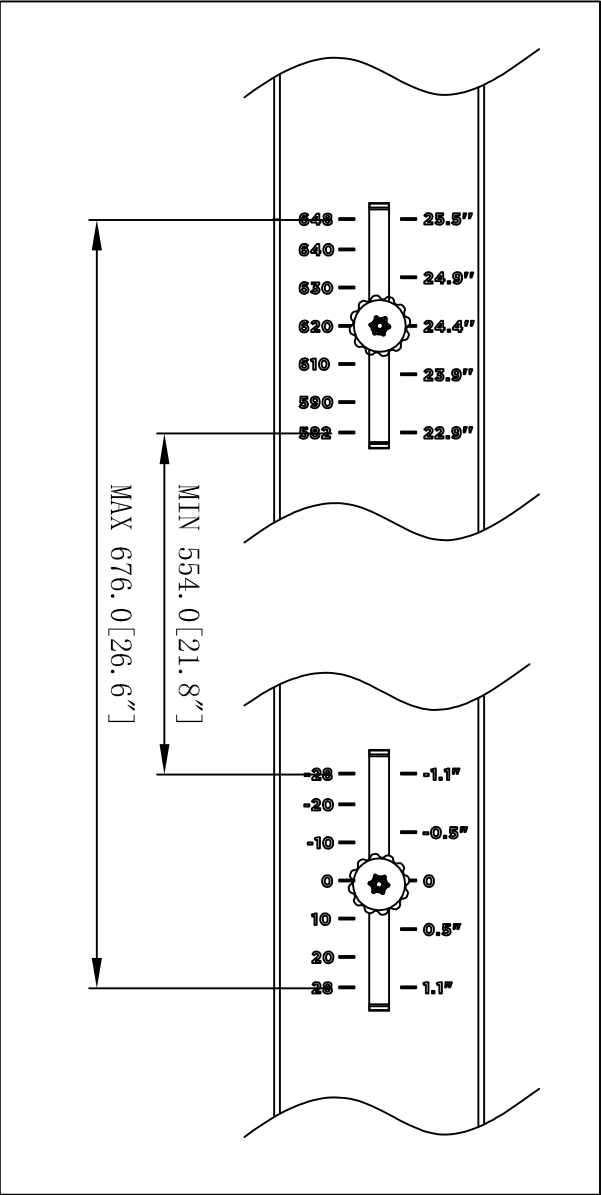

- NOTES:
- UNLESS OTHER SPECIFIED, ALL DIMENSIONS ARE IN MM(IN)
 - SEE PRODUCT OVERVIEW AND SPECIFICATIONS SHEET FOR FURTHER INFORMATION
 - STANDARD INPUT POWER CORD LENGTH IS 3000MM(118.0IN)
 - DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE QUICK START GUIDE
 - BRACKET KITS TO MOUNT TO SPECIFIC RACKS & ENCLOSURES ARE AVAILABLE AS OPTIONS
 - CONNECT SUPPLEMENTARY EXTERNAL EARTH GROUND TO THE M6 SIZE THREADED NUT

UNLESS NOTED, DIMENSIONS IN MILLIMETERS & TOLERANCES ARE: X ± 1 MM XX ± 0.5 MM XXX ± 0.20 MM 00.XX ± 0.3 MM 00.XX ± 0.10 MM		DESIGNER & DATE		enlogic	TOP ASSEMBLY EN6101	REV
CHECKER & DATE		STANDARDIZATION & DATE				
APPROVER & DATE		P/N				
ITEM VIEW/REFERENCE (ONLY)		9				
THIRD ANGLE PROJECTION		SCALE: 1/4" (30 MM) SCALE DRAWING				
		INTERPRET PER ASME Y14.5-1994		SIZE: A3	SHEET 1 OF 1	