




客户信息/ Customer info.	ECN 编号	图号	处数	版本	签名	日期
版本号/REV. 图号/PN	ECN 号 No.	Draw mark	Places	REV.	Sign	Date
--	--	--	--	E1	Luo Jinbo	20200420

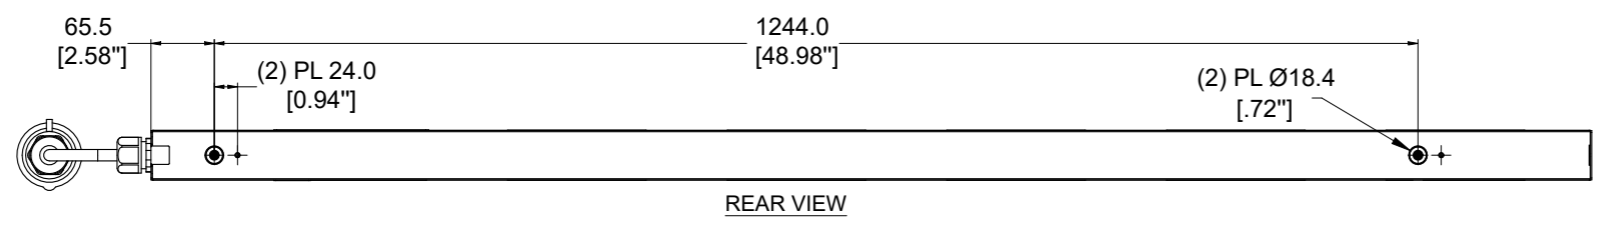

REAR VIEW

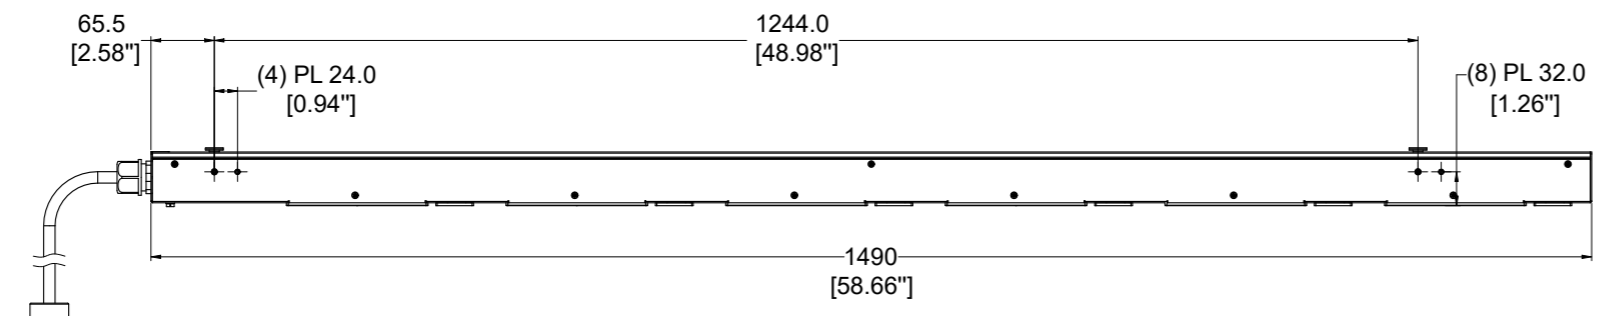

BOTTOM VIEW

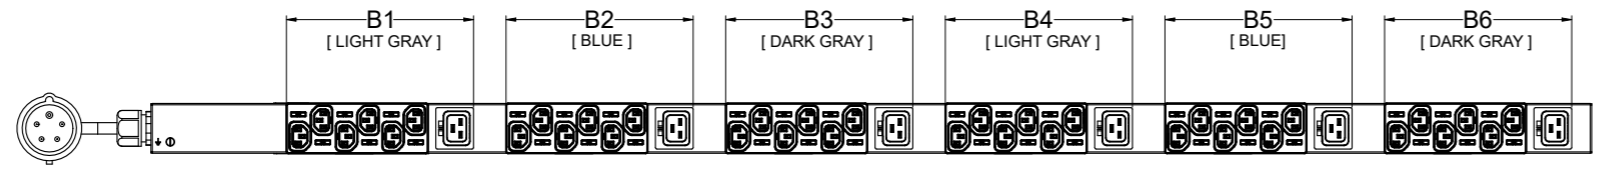

FRONT VIEW

PLUG
16 AMP, 230/400V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF IP44
2Q (S); 4R (W), 6H


RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

SPECIFICATION:
1. STANDARD:

UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(36) C13, (6) C19
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	16A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	11.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 16A
INPUT CORD LENGTH:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

NOTE:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSION ARE IN INCHES

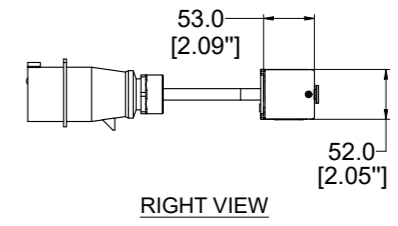

RIGHT VIEW

CISGLOBAL			项目	EN2.0	阶段标记		
			Project		S		
泛亚电子工业无锡			图号	TA-EB0403A			
设计/Design	Jingnan 有限公司	日期/Date	2020.05.20	名称	PDU	重量/Weight	N/A
审核/Check	Aric Wang	日期/Date	2020.05.20	比例/Scale	1:3		
工艺会签/Review	Talon LV	日期/Date	2020.05.20	材料	Assembly	纸型/Size	A2
批准/Approve	Hanson Xu	日期/Date	2020.05.20	Material		共1	第1