
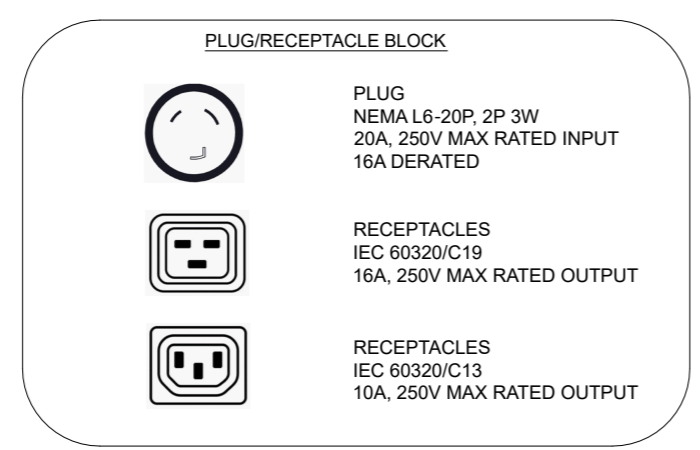


SPECIFICATION:

1. STANDARD:

UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, HALF
OUTLET QTY&TYPE:	(12) C13, (4) C19
INPUT VOLTAGE:	100-240VAC
INPUT CURRENT:	20A (16A DERATED)
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	3.3kVA
INPUT PLUG:	NEMA L6-20P
INPUT POWER CORD:	3m[10], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT



CISGLOBAL				项目	EN2.0	阶段标记	
				Project		S	
泛亚电子工业无锡有限公司				图号	TA-N2316EA		
设计/Design	Jingbo Luo	日期/Date	2020.05.20	名称	PDU	重量/Weight	N/A
审核/Check	Aric Wang	日期/Date	2020.05.20	Title		比例/Scale	1:3
工艺检查/Review	Talon LV	日期/Date	2020.05.20	材料	Assembly	规格/Size	A2
批准/Approve	Hanson Xu	日期/Date	2020.05.20	Material		共1页	第1页