




DESIGN(PDU)
ENGINEERING

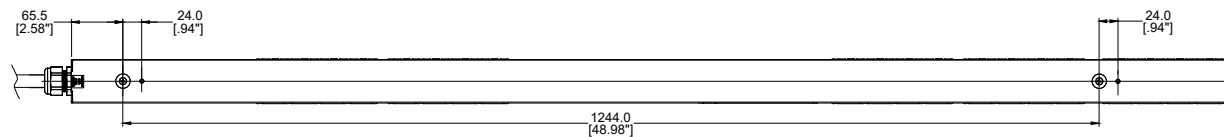


REAR VIEW

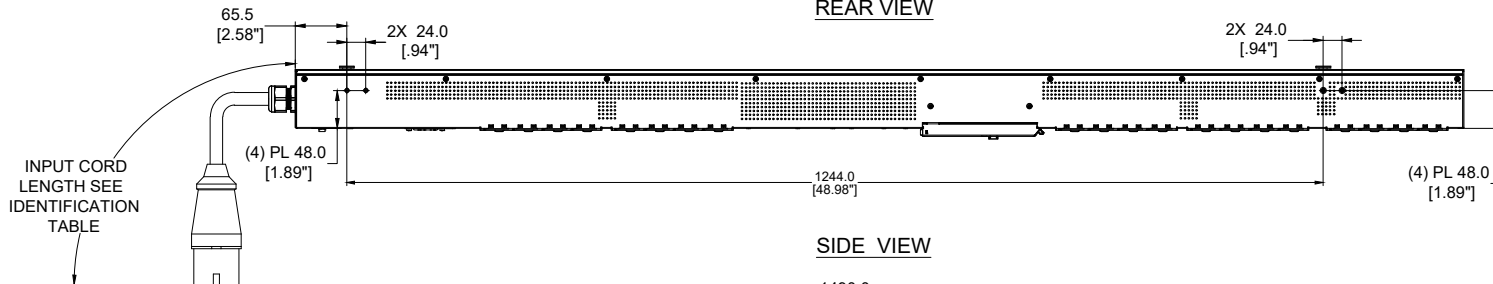

SIDE VIEW

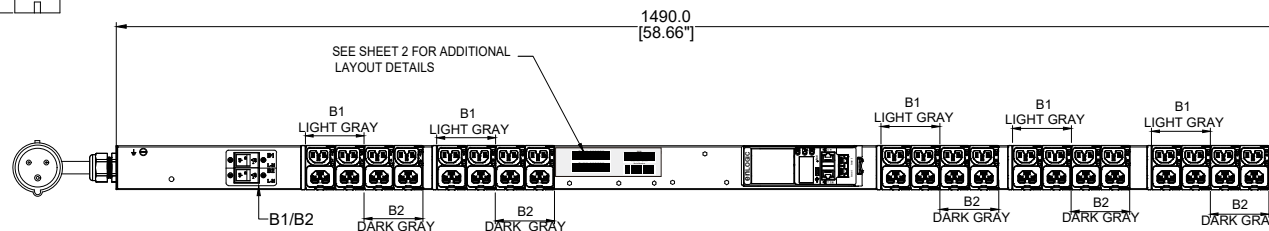

FRONT VIEW

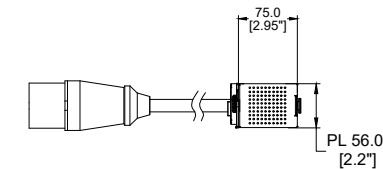

BOTTOM VIEW

TECHNICAL SPECIFICATIONS	
UNIT TYPE:	MONITORED SWITCHED
ORIENTATION:	VERTICAL, MID
OUTLET QTY & TYPE:	(20)C13/C15,(20)C13/C15/C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	32A
BREAKER QTY & TYPE:	(2) 20AMP, SINGLE-POLE .5KA
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	7.4kVA
INPUT PLUG:	SEE NOTE 7
INPUT POWER CORD:	SEE IDENTIFICATION TABLE
FEATURES	
METERING ACCURACY	+/-1% TO ISO/ IEC 62052-21
METERING ATTRIBUTES	VOLTAGE(V), CURRENT(A), APPARENT POWER(kVA), REAL POWER(kW), POWER FACTOR, ENERGY(kWh)
METERED COMPONENTS	INPUT(PHASE), CIRCUIT BREAKERS
REMOTE OUTLET SWITCHING	YES
ENVIRONMENTAL CONDITIONS	
OPERATING TEMPERATURE	-5 TO 60 C (23 TO 140 F)
STORAGE TEMPERATURE	-20 TO 60 C (-4 TO 140 F)
HUMIDITY (OPERATING/STORAGE)	5-90% RH / 5-95% RH; NON-CONDENSING
MAX OPERATING ELEVATION, ABOVE MSL	3000M(9840FT)
COMPLIANCE	
SAFETY&ENVIRONMENTAL	RoHS COMPLIANT

IDENTIFICATION TABLE	EN2350-	*	*	*	*
MODEL IS SHOWN IN DEFAULT CONFIGURATION. FOR OPTIONAL CONFIGURATIONS, USE ITEM IDENTIFIER CODE IN PLACE OF EACH ASTERISK. ORDERABLE BASED ON FORMAT: EN2350-*****		INPUT PLUG (DEFAULT)332P6(IP44)=0	CHASSIS COLOR (DEFAULT) BLACK = 0 RED = R GREEN = G BLUE = B WHITE = W YELLOW = Y	CORD OPTION (DEFAULT) 3m [10'] = 0 1m [3.2'] = 1 2m [6.6'] = 2 3m [10'] = 3	ORIENTATION (DEFAULT) TOP FEED = 0 BOTTOM FEED = 2
OPTIONS LISTED ON THIS ROW ARE NON STANDARD, CONTACT SALES FOR ADDITIONAL INFORMATION		(OPTIONAL)332P6W(IP67)=J	ORANGE = A	0.5m [1.6'] = A 1.5m [4.9'] = B 2.5m [8.2'] = C 1.2m [4'] = G 1.8m [6'] = F	

NOTES :




1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
3. UNIVERSAL MOUNTING BRACKET IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURES. BRACKET IS PROVIDED WITH THE UNIT.
4. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE QUICK START GUIDE
5. CONNECT EXTERNAL EARTH GROUND TO THE 10-32 SIZE THREADED NUT
6. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION
7. INPUT PLUG CONFIGURATION (SEE IDENTIFICATION TABLE) FOR DUAL-RATED UNITS, NEMA PLUGS ARE NAM RATED ONLY AND CAPTIVE AUS/NZ PLUGS ARE EMEA RATED ONLY

enLOGIC by nvent

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF CIS GLOBAL AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM CIS GLOBAL. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE

	E1	INITIAL DRAFT REVIEW		2023/02/02	LRF	
ECN/ECO	REV.	DESCRIPTION		DATE	APPROVED	
REVISIONS						
TITLE : Advantage Series Metered Switched		UNLESS NOTED, DIMENSIONS ARE IN MILLIMETERS & TOLERANCES ARE: X ±1 MM X* ±1* X.X ±0.5 MM X.X* ±0.5* X ±0.20 MM Ø X.X ±0.3 MM Ø X.XX ±0.10 MM BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY ⊕ THRID ANGLE PROJECTION INTERPRET PER ASME Y14.5M-1994		PART NO: EN2350-WXYZ_DA		REV. E1
				DRAWN BY: LRF		2023/02/02
				ENGINEER: LJB		2023/02/02
				APPROVED BY: Hanson		2023/02/02
PROJECT : enLOGIC		SCALE : N/A		SHEET 1 OF 3		SIZE: A3

DESIGN (PDU)
ENGINEERING

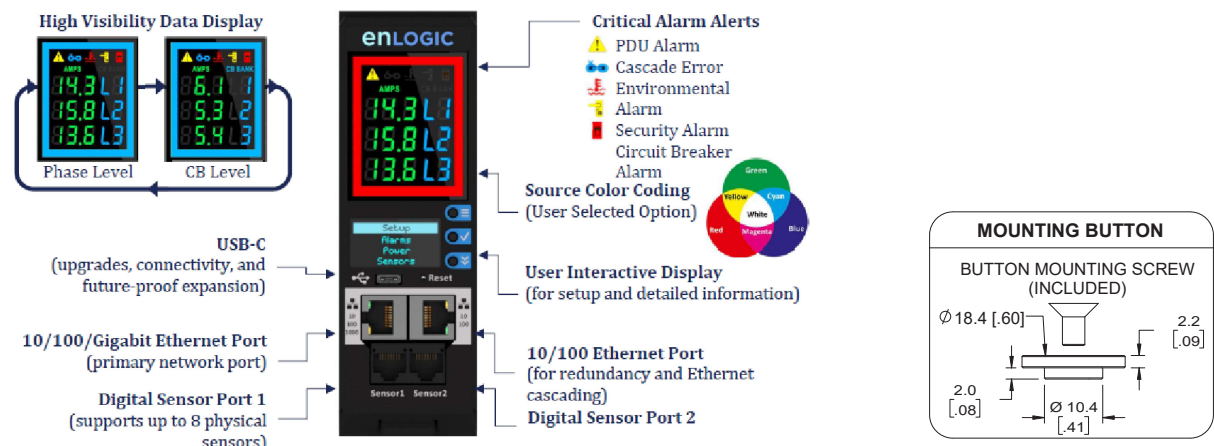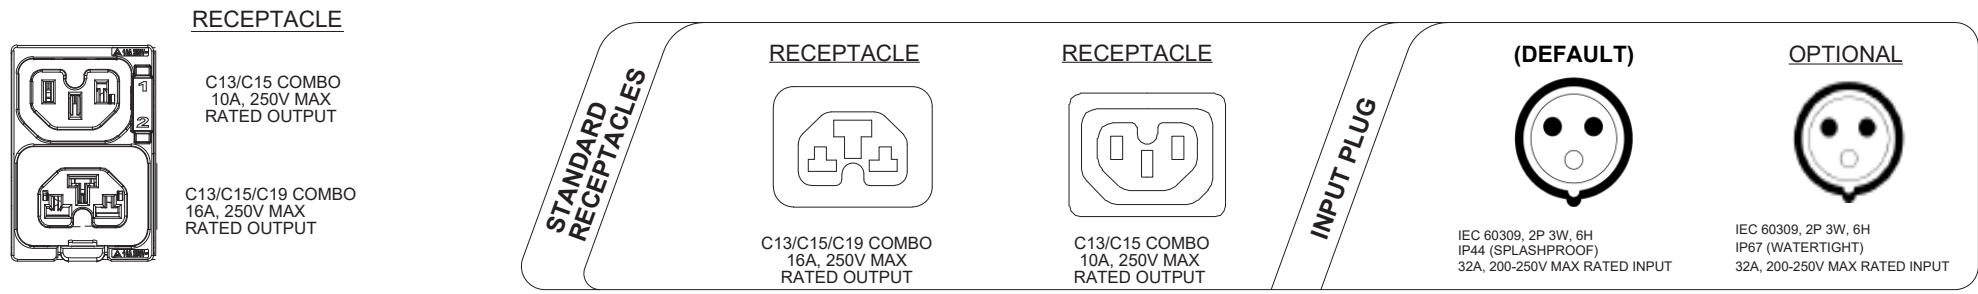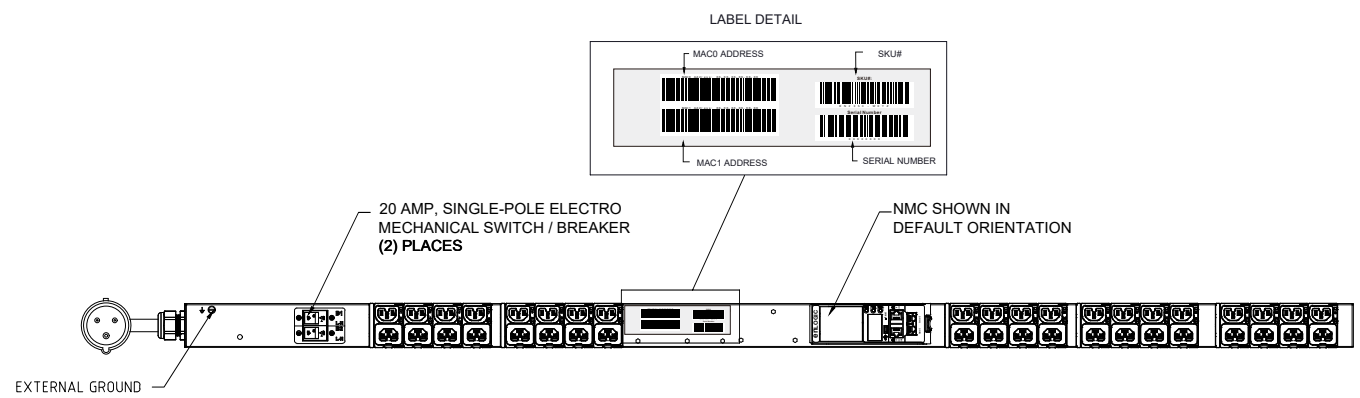

NOTES:
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF CIS GLOBAL AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM CIS GLOBAL. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE

TITLE: Advantage Series Metered Switched

PROJECT: enLOGIC

UNLESS NOTED, DIMENSIONS ARE IN MILLIMETERS & TOLERANCES ARE:
X. ±1 MM X" ±1"
X.X ±0.5 MM X.X" ±0.5"
X.XX ±0.20 MM
Ø X.X ±0.3 MM
Ø X.XX ±0.10 MM

BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY
⊕ THRD ANGLE PROJECTION
INTERPRET PER ASME Y14.5M-1994

PART NO: EN2350-WXYZ_DA	REV. E1
DRAWN BY: LRF	2023/02/02
ENGINEER: LJB	2023/02/02
APPROVED BY: Hanson	2023/02/02
SCALE: N/A	SHEET 2 OF 3
	SIZE: A3

enLOGIC

RACK Power Distribution Unit

Metered Switched

Made in XXXXX

N

CE

UK

CA

1000V

1000V

1000V

CIS Global LLC

1881 W COMMERCE

ST LOUIS, MO

63114

SKU#:

EN2350-WXYZ

Serial Number

XXXXXXXXXX

SKU #: EN2350-WXYZ

Model #: EP121032-0060-C

INPUT: 200-240VAC, 1PHASE, 50/60Hz, 32A

OUTPUT: C13/C15 COMBO; 200-240VAC, 10A per outlet

C13/C15/C19 COMBO; 200-240VAC, 16A max per outlet

32A Total

MAC0 Address:XX-XX-XX-XX-XX

MAC1 Address:XX-XX-XX-XX-XX

NOTES:

1. INTERNAL WIRING

WIRE TYPE: UL AWM 1015,10 & 12 & 18 AWG

LINE 1/R/X COLOR: BROWN

EARTH GROUND COLOR: GREEN STRIPE

NEUTRAL COLOR: BLUE

2. FOR FINISHED GOOD PART NUMBER SEE IDENTIFICATION

DESIGN (PDU)
ENGINEERING

COMPLIANCE LABEL

INTERNAL WIRING SCHEMATIC DIAGRAM

NOTES:

1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.

2. SEE PRODUCT DOCUMENTATION FOR FURTHER INFORMATION

3. THIS DRAWING DEPICTS THE POWER SYSTEM CONNECTIONS AND IS NOT REPRESENTATIVE OF THE PHYSICAL LAYOUT. PLEASE REFER TO MECHANICAL DRAWINGS FOR PHYSICAL LAYOUT.

enLOGIC

by nvent

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF CIS GLOBAL AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM CIS GLOBAL. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE

TITLE:

Advantage Series

Metered Switched

PROJECT:

enLOGIC

UNLESS NOTED, DIMENSIONS ARE IN MILLIMETERS & TOLERANCES ARE:

X. ±1 MM

X.X ±0.5 MM

X.XX ±0.20 MM

Ø X.X ±0.3 MM

Ø X.XX ±0.10 MM

BRACKETED DIMENSIONS ARE IN INCHES FOR REFERENCE ONLY

THIRD ANGLE PROJECTION

INTERPRET PER ASME Y14.5M-1994

PART NO:

EN2350-WXYZ_DA

SCALE: N/A

REV. E1

DRAWN BY: LRF

ENGINEER: LJB

APPROVED BY: Hanson

SHEET 3 OF 3

SIZE: A3